


model 52794

BASIC BT

by **KBSOUND**

eissOUND **KBSOUND**®

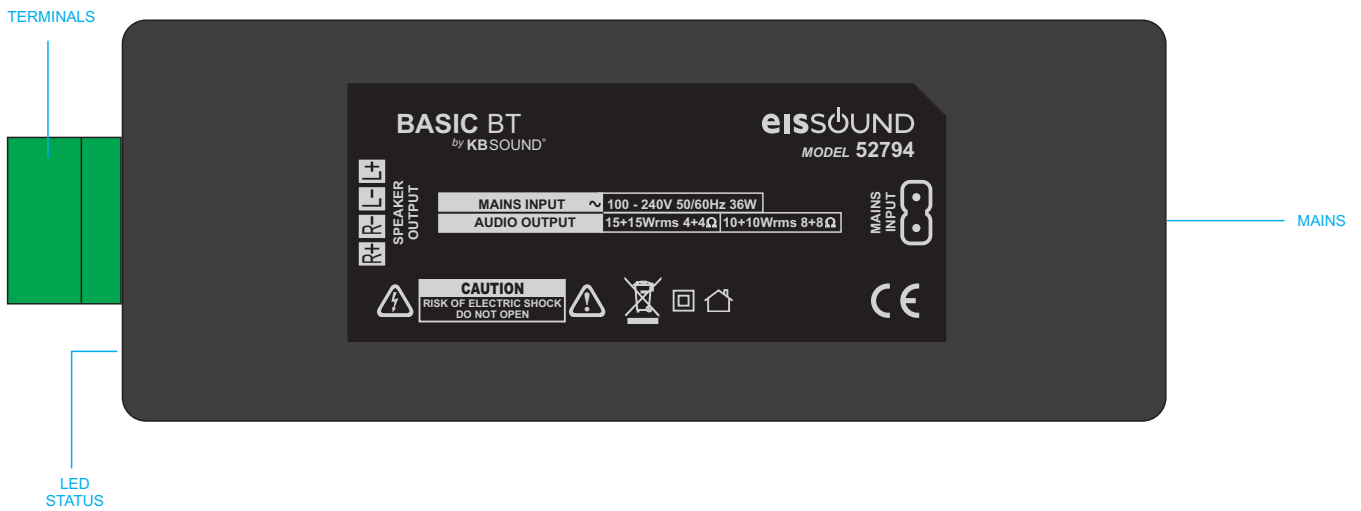

Features

- Bluetooth streaming v4.1
- Power supply = 100/240Vac 50/60Hz
- Consumption (max) = 36W
- Speaker impedance = 4/8/16 ohms

Terminals

R+/R- = Right speaker output
L+/L- = Left speaker output

LED display

blue flashing fast	BT pairing process
blue ON	BT connected

eissOUND

Pol. Malpica G. Quejido 87-88
50016 Zaragoza (SPAIN)
Tel.: +34 976 465 550
Fax: +34 976 465 559
marketing@eissound.com
www.eissound.com

KBSOUND

245 Riverside Av. Suite 150
Jacksonville, FL 32202 (USA)
info@kbsound.com
www.kbsound.com

AENOR



Empresa Registrada

ER-0634/1998



CC-1222ENG-00
64410112



52794	MIN	NORMAL	MAX		COMMENTS
Measurements		159,5x54x35,5		mm	
IP level		IPX6			
Voltage	100		240	Vac	50/60Hz
Consumption demand			36	W	4 ohm
			28	W	8 ohm
			15	W	16 ohm
Output power			15+15	W	4 ohm
			10+10	W	8 ohm
			6+6	W	16 ohm
Passband	30		18.000	Hz	
Input sensitivity		81		dB	dBm0,1%
Distortion		0,05		%	
SNR		100		dB	
Bluetooth spec.	Class2 BT4.1 + EDR A2DP 1.2 AVRCP 1.4				
Wireless transceiver		2,4		GHz	ISM Band
RF transmission power		3,31		dBm	
RF antenna		internal			
Bluetooth range			10	m	

