


Incremental encoders

Heavy Duty shaft, optical


Sendix Heavy Duty H100 (shaft)

Push-pull / RS422 / speed switch

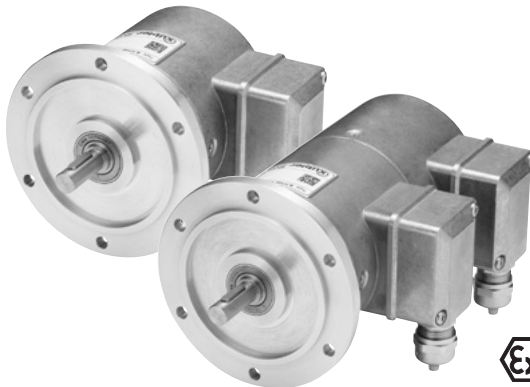

The Sendix Heavy Duty encoder H100 is an extremely rugged incremental encoder available in 3 versions: encoder with or without speed switch and double encoder.

Thanks to the special HD-Safety-Lock™ construction it is ideally suited for applications in heavy industry, such as steel works and cranes. Resistant materials, wide temperature ranges and a high protection level ensure it remains unaffected by the harshest environmental conditions. Its innovative connection technology enables simple quick installation.

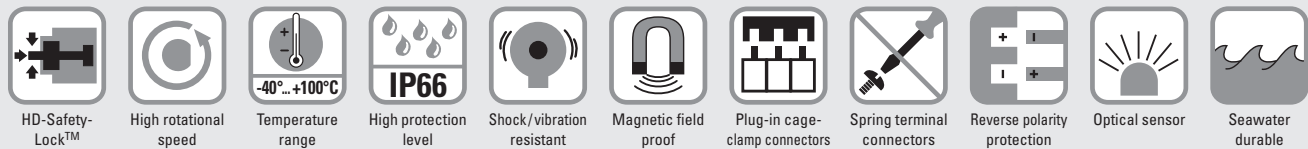

Suitable for your Heavy Duty application

- HD-Safety-Lock™ bearing construction for an extremely high bearing load capacity of up to 300 N axial and 400 N radial.
- With a temperature range from -40°C up to +100°C, IP66 protection and seawater durable material the encoder is resistant to harsh environmental conditions.
- Feather key shaft slot ensures positive fitting to the application.
- Safe overspeed protection by means of mechanical speed switch.

Simple quick installation

- Innovative plug-in spring terminal connectors in the terminal box greatly simplify the cable connection and offer a very high level of safety.
- Various connection possibilities thanks to terminal box being rotatable through 180°.
- Large number of resolution and switching speed options available as standard.

Order code without speed switch

8.H100 . 1 1 1 X . XXXX
Type a b c d e

a Flange
1 = Euro RE0444

b Shaft (ø x L), with feather key shaft slot
1 = ø 11 x 30 mm [0.43 x 1.18"]

c Version
1 = incremental encoder

d Output circuit / power supply
1 = RS422 (with inverted signal) / 5 ... 30 V DC
2 = Push-pull (with inverted signal) / 10 ... 30 V DC

e Pulse rate
1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400,
500, 512, 600, 800, 1000, 1024, 1200, 2000,
2048, 2500, 3600, 4096, 5000
(e.g. 100 pulse => 0100)

Optional on request
- other pulse rates
- Ex 2/22

Order code with speed switch

8.H100 . 1 1 2 X . XXXX . XXXX . 1
Type a b c d e f g

a Flange
1 = Euro RE0444

b Shaft (ø x L), with feather key shaft slot
1 = ø 11 x 30 mm [0.43 x 1.18"]

c Version
2 = incremental encoder with mech. speed switch

d Output circuit / power supply
1 = RS422 (with inverted signal) / 5 ... 30 V DC
2 = Push-pull (with inverted signal) / 10 ... 30 V DC

e Pulse rate
1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400,
500, 512, 600, 800, 1000, 1024, 1200, 2000,
2048, 2500, 3600, 4096, 5000
(e.g. 100 pulse => 0100)

f Switching speed
750, 1000, 2000, 3000, 4000

g Switching accuracy
1 = standard (±4 % at 100 rad/s²)

Optional on request
- other pulse rates
- other switching speeds
- other switching accuracies
- Ex 2/22

Incremental encoders

Heavy Duty shaft, optical	Sendix Heavy Duty H100 (shaft)	Push-pull / RS422 / speed switch
----------------------------------	---------------------------------------	---

Order code double encoder	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td style="padding: 2px 5px;">8.H100</td> <td style="padding: 2px 5px;">.</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">1</td> <td style="padding: 2px 5px;">3</td> <td style="padding: 2px 5px;">X</td> <td style="padding: 2px 5px;">.</td> <td style="padding: 2px 5px;">XXXX</td> <td style="padding: 2px 5px;">.</td> <td style="padding: 2px 5px;">XXXX</td> </tr> <tr> <td style="font-size: 8px;">Type</td> <td></td> <td style="font-size: 8px;">a</td> <td style="font-size: 8px;">b</td> <td style="font-size: 8px;">c</td> <td style="font-size: 8px;">d</td> <td></td> <td style="font-size: 8px;">e</td> <td></td> <td style="font-size: 8px;">f</td> </tr> </table>	8.H100	.	1	1	3	X	.	XXXX	.	XXXX	Type		a	b	c	d		e		f
8.H100	.	1	1	3	X	.	XXXX	.	XXXX												
Type		a	b	c	d		e		f												

<p>a Flange 1 = Euro RE0444</p> <p>b Shaft (ø x L), with feather key shaft slot 1 = ø 11 x 30 mm [0.43 x 1.18"]</p> <p>c Version 3 = 2 x incremental encoder</p>	<p>d Output circuit / power supply 1 = RS422 (with inverted signal) / 5 ... 30 V DC 2 = Push-pull (with inverted signal) / 10 ... 30 V DC</p> <p>e Pulse rate encoder 1 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulse => 0100)</p>	<p>f Pulse rate encoder 2 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulse => 0100)</p> <p><i>Optional on request</i> - other pulse rates - Ex 2/22</p>
---	--	---

Incremental encoders

Mounting accessory	Order no.
Coupling double loop coupling for shaft 12 mm [0.47"] with feather key shaft slot 4 mm [0.16"]	8.0000.1L01.1112
Accessories – connecting cable	Order no.
Encoder cable PUR-trailing cable, shielded, halogen free, orange 4 x 2 x 0.25 mm ² [AWG 23] + 2 x 1 mm ² [AWG 17], twisted pair	8.0000.6400.XXXX ¹⁾
Speed switch cable TPE-trailing cable, shielded, halogen free, black – 5 x 0.75 mm ² [AWG 18]	8.0000.6600.XXXX ¹⁾

Technical data

Mechanical characteristics	
Maximum speed	6000 min ⁻¹
Starting torque with seal – at 20°C [68°F]	~ 2 Ncm
Load capacity of shaft	radial 400 N axial 300 N
Weight	H100 ~ 1.8 kg [63.49 oz] H100 + speed switch ~ 2.7 kg [95.24 oz]
Protection acc. to EN 60529	IP66
Working temperature range (surface of housing)	-40°C ... +100°C [-40°F ... + 212°F]
Materials	shaft stainless steel housing aluminum die-cast (EN AC-44300), seawater durable coating flange seawater durable aluminum type Al Si Mg Mn (EN AW-6082)
Shock resistance acc. to EN 60068-2-27	3000 m/s ² (1 ms)
Vibration resistance acc. to EN 60068-2-27	without speed switch 100 m/s ² , 10 ... 2000 Hz with speed switch, switching speed > 1000 100 m/s ² , 10 ... 400 Hz with speed switch, switching speed < 1000 50 m/s ² , 10 ... 400 Hz

Electrical characteristics		
Output circuit	RS422 (TTL compatible)	Push-pull (HTL) up to 150 m [492.13'] cable length
Power supply	5 ... 30 V DC	10 ... 30 V DC
Power consumption (no load) with inverted signal	typ. 40 mA max. 90 mA	typ. 50 mA max. 100 mA
Permissible load per channel	DC peak max. +/- 20 mA max. +/- 30 mA	max. +/- 30 mA max. +/- 70 mA
Pulse frequency	max. 300 kHz	max. 300 kHz
Pulse frequency with 150 m [492.13'] cable length	max. 300 kHz	max. 80 kHz
Signal level	HIGH min. 2.5 V LOW max. 0.5 V	min. +V - 2.5 V max. 0.5 V
Rising edge time t_r	max. 200 ns	max. 1 µs
Falling edge time t_f	max. 200 ns	max. 1 µs
Short circuit proof outputs ²⁾	yes ³⁾	yes
Reverse polarity protection of the power supply	yes	yes
CE-compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU	

1) XXXX = cable length in meters.
 2) If power supply +V correctly applied.
 3) Only one channel allowed to be shorted-out:
 At +V short circuit to channel or 0 V is permitted.


Incremental encoders

Heavy Duty shaft, optical	Sendix Heavy Duty H100 (shaft)	Push-pull / RS422 / speed switch
----------------------------------	---------------------------------------	---

Speed switch	
Switching speed (ns)	750 ... 4000 min ⁻¹
Max. rotational speed (mechanical)	1.25 x ns
Switching accuracy with acceleration $\alpha = 100 \text{ rad/s}^2$ (corresponds $\Delta n = 955 \text{ min}^{-1}/\text{s}$)	$\pm 4 \%$ of ns
Switching difference cw/ccw rotation	$\sim 3 \%$
Switching hysteresis (Xd)	$\sim 40 \%$ up to 80% of ns
Switching capacity	3 A / max. 50 V AC 1 A / max. 75 V DC

(more details see manual)


Definition switching hysteresis (Xd)

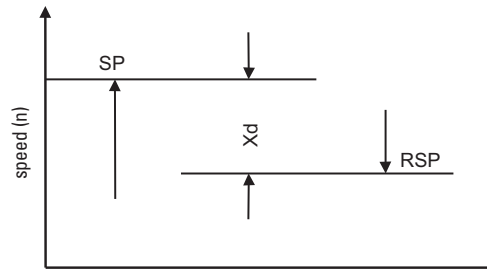


SP = switching point (for switching speed ns)
RSP = reset point
Xd = switching difference (hysteresis)

Terminal assignment terminal connections

Incremental encoders




B incremental track B
A incremental track A
- 0 V
+ +V
PE shield




0 incremental track 0
 \bar{A} incremental track \bar{A}
 \bar{B} incremental track \bar{B}
 $\bar{0}$ incremental track $\bar{0}$

Speed switch



4, 1 normally open (NO)
3, 2 normally closed (NC)
PE shield

Jumper

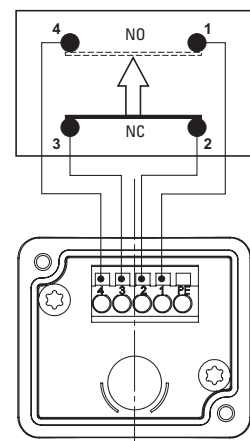

Incremental encoders


Heavy Duty shaft, optical	Sendix Heavy Duty H100 (shaft)	Push-pull / RS422 / speed switch
----------------------------------	---------------------------------------	---

Dimensions

Dimensions in mm [inch]

Incremental encoder Version 1

- 1 Feather key acc. to ISO 773
4 x 4 x 20 [0.16 x 0.16 x 0.79]

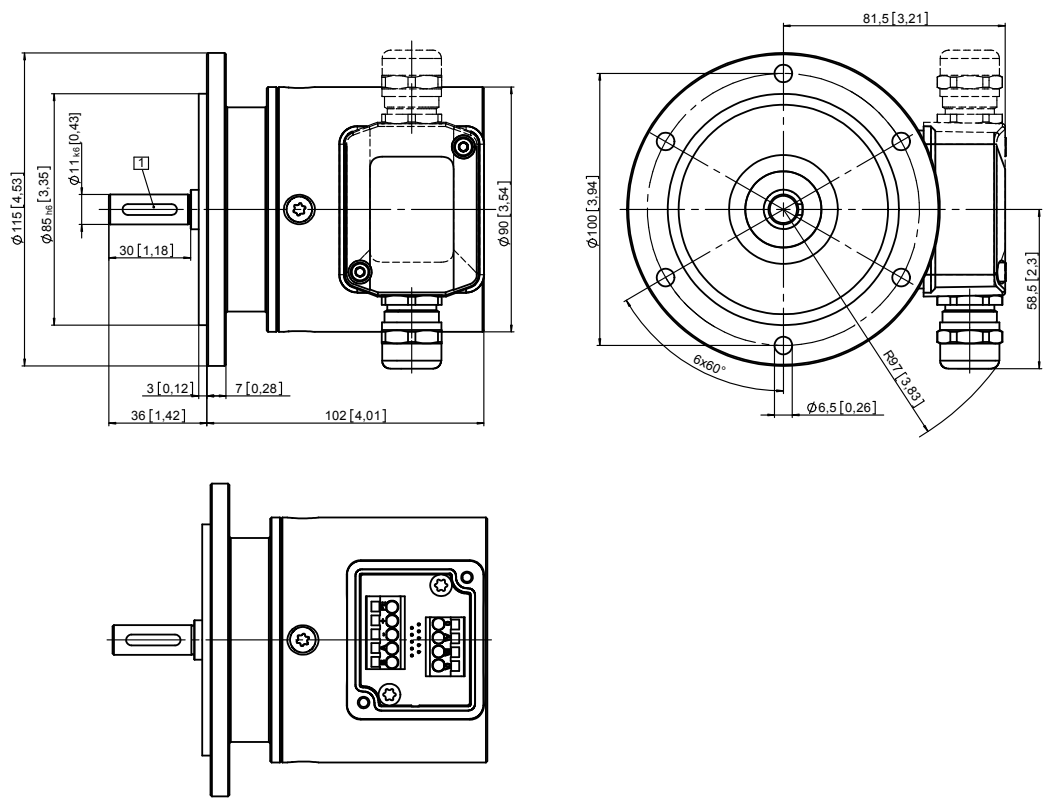

Incremental encoders

Incremental encoders

**Heavy Duty
shaft, optical**

Sendix Heavy Duty H100 (shaft)

Push-pull / RS422 / speed switch

Dimensions

Dimensions in mm [inch]

**Incremental encoder with mechanical speed switch or 2 x incremental encoder (double encoder)
Version 2 or 3**

- 1 Feather key acc. to ISO 773
4 x 4 x 20 [0.16 x 0.16 x 0.79]

