




- Suitable for diodes and resistors
- Small size

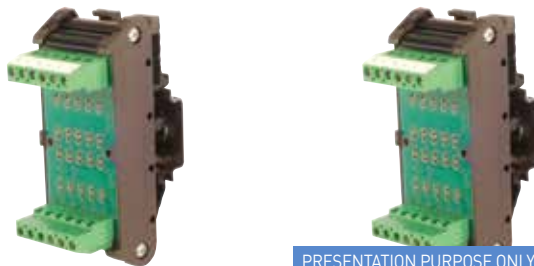

CODE	XCCM08CV	XCCM16CV
TYPE	CCM08CV	CCM16CV
<b>GENERAL TECHNICAL DATA</b>		
Number of poles	8	16
Version	with common connection	with common connection
Input rated voltage	0...220 V ±10%	0...220 V ±10%
Input rated current	5 A channel / 15 A on common	5 A channel / 15 A on common
Operating temperature	-20...+60°C	-20...+60°C
Standards approvals	—	—
Overvoltage category /pollution degree	II / 2	II / 2
Protection degree	IP 00	IP 00
Connection terminal	2.5 mm <sup>2</sup> screw	2.5 mm <sup>2</sup> screw
Status indication	—	—
Dimensions	25x55x93 mm	47x66x93 mm
Approximate weight	—	—
Housing material	UL94V-0 plastic material	UL94V-0 plastic material
Mounting informations	vertical on rails, side by side	vertical on rails, side by side
APPROVALS	<b>CE</b>	<b>CE</b>
<b>ACCESSORIES</b>		
Mounting rail IEC60715 TH35 75	PR003, PR903, PR005, PR937	PR003, PR903, PR005, PR938
Mounting rail IEC60715 TH35 15	PR007, PR907, PR006, PR938	PR007, PR907, PR006, PR939
Marking tag	—	—