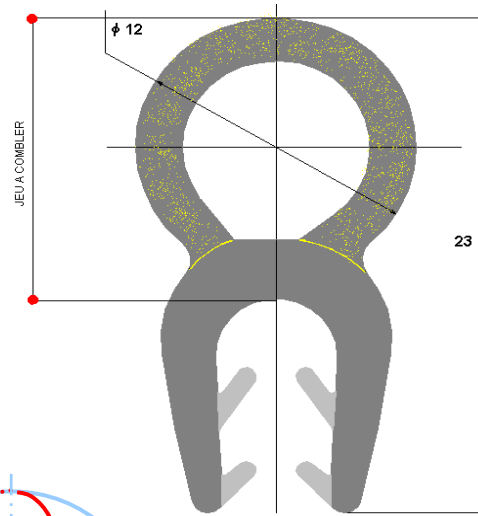



	PRODUCT NAME TS15 ITEM NUMBER 9G468	
PRODUCT PICTURE		
		
		SCALE 1:1 

PRODUCT DESCRIPTION

Cellular rubber : gives flexibility when collapsed
 Rigid rubber clip : gives an elastic tightening
 Soft rubber lips : good pull-out behaviour

MATERIAL	TUBING	Material :	Black cellular rubber
	CLIP	Grade :	Black EPDM
		Hardness :	95 Shores A
	LIPS	Grade :	Black EPDM
		Hardness :	60 Shores A

MAXIMAL TEMPERATURES OF USE OF THE PROFIL (°C)		
<i>Nonstop static</i> 80	<i>Nonstop under constraints</i> 70	<i>Hottest (max duration 30 min)</i> 110

DIMENSIONS OF THE CLIP (mm)			
<i>Allowed sheet width</i>	2,5 to 3,5	<i>Depth of the clip</i>	9

MINIMAL BENDING RADIUS (mm)			
X	<i>Limit</i>	Y	<i>Limit</i>
20	tubing collapse	+60	tubing pinching
		-60	tubing collapse

GAP - Direction Y - (mm)				
		MINI	ADVISED	MAXI
gap		5	8 10	13
tubing collapse		100%	50% 30%	0%

For all inquiries feel free to contact : HUTCHINSON - Le Pommarin - BP 17 - 38430 MOIRANS
 Tel. +33 4 76 35 79 00 - Fax +33 4 76 35 79 09

